




מדינת ישראל
STATE OF ISRAEL

Ministry of Justice
Patent Office

משרד המשפטים
לשכת הפטנטים

This is to certify that
annexed hereto is a true
copy of the documents as
originally deposited with
the patent application
particulars of which are
specified on the first page
of the annex.

זאת לתעודה כי
רצופים בזה העתקים
נכונים של המסמכים
שהופקדו לכתחילה
עם הבקשה לפטנט
לפי הפרטים הרשומים
בעמוד הראשון של
הנספח.

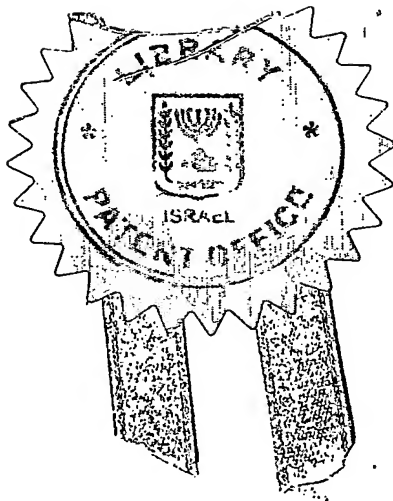

נתאשר
Certified

לשימוש הלשכה
For Office Use

158887

מספר:
Number

16-11-2003

תאריך:
Date

חוקר/מורה
Ante/Post-dated

Silex Projects, Ltd.
ID 512937103
From 12 Menora St.
Givataim, Israel

חוק הפטנטים, התשכ"ז-1967
PATENTS LAW, 5727-1967

בקשה לפטנט
Application for Patent

אני, (שם המבקש, מענו - ולגבי גוף מאוחד - מקום התאגדותו)
I (Name and address of applicant, and, in case of a body corporate, place of incorporation)

סילקס פרויקטים בע"מ
ח.פ. 512937103
מרחוב מנורה 12
גבעתיים

שם המצאה
mer, by virtue of

היותי הממציא

בעל אמצאה מכה
of an invention, the title of which is:

(בעברית)
שופרת ממנת
(Hebrew)

Dispensing Tube

(באנגלית)
(English)

by apply for a patent to be granted to me in respect thereof.

מבקש בזאת כי ינתן לי עליה פטנט.

* בקשת חלוקה - Application for Division		* בקשת פטנט מוסף - Application for Patent of Addition			* דרישת דין קדימה Priority Claim		
מבקשת פטנט from Application		לבקשה/לפטנט to Patent/Appl.		מספר/סימן Number/Mark	תאריך Date	מדינת האיגוד Convention Country	
No. _____ dated _____		No. _____ dated _____					
* יפוי כח: כללי/מיוחד - רצוף בזה / עוד יוש P.O.A.: general / specific - attached / to be filed later -							
חוש בענין _____ Has been filed in case _____							
המען למסירת החזקות ומסמכים בישראל							
SILEX Projects Ltd. 132 Kfar Meishar 76850		סילקס פרויקטים בע"מ כפר מישר 132 מיקוד 76850					
חתימת המבקש Signature of Applicant				3 200- This 6	11 November	6 בחדש 200: 3	
Gideon Kahana ID. # 51825925				לשימוש הלשכה For Office Use			

סומס זת, כשהוא מוטבע בחותם לשכת הפטנטים ומושלם במספר ובתאריך החזקה, הינו אישור לחזקה הבקשה שפורסמה רשומים לעיל.
this form, impressed with the Seal of the Patent Office and indicating the number and date of filing, certifies the filing of the application,
 particulars of which are set out above.

• מחק את המיותר Delete whatever is inapplicable

Dispensing Tube

שפופרת ממננת

FIELD OF THE INVENTION

The present invention relates to the field of dispensers and packaging. More specifically, the present invention relates to a tube-like container for the controlled dispensing and dosing of liquid products, and a method for fabricating said tube wherein a pumping assembly is inserted into the end of said tube. More specifically, the present invention relates to a tube-like container assembled in this manner, wherein a section of the package wall serves as a pumping button activating said pump assembly in order to expel the contents of the tube.

BACKGROUND OF THE INVENTION

Various forms of dosing packages are becoming increasingly popular. Such packages include rigid bottles with a dispensing pump mounted on the bottle neck, and dispensing bottles where the contents are squeezed out by squeezing the bottle with a hand. The former are typically used for liquid soap and various other personal care products such as shampoo. The latter are often used for condiments such as ketchup, chocolate sauce, etc.

The dispensing bottle, where the package walls are squeezed, represents a simple and inexpensive form of a dispensing package, albeit one where the user's control over the dispensing is very limited. On the other hand, while dispensing pumps afford good dosing control, they are expensive to produce. In an effort to bridge the gap between these two concepts, a number of dispensing-package designs based on performing a pumping action via the package wall while integrating a pump mechanism, have been proposed. For example, the prior art contains a number of examples in which a pumping bulb is formed from part of the wall of the package, where the pressure applied on this pressure bulb operates an integral pumping mechanism: US 3,715,060 describes a dispenser in which the neck of the container incorporates a swelling which forms a pressure bulb, via which an integral pumping mechanism is operated; US 4,201, 317 and US 4,336,895 describe

a variable volume pump chamber in the shape of a bellows with a finger operated actuator which may include an integrally molded trigger; US 5,261,755 describes a dispenser in which a bulbous section of the dispenser can be pressed in order to apply pressure onto the fluid contents of the dispenser and thus eject it from the container; US 5,303,851 describes a blow-molded dispensing bottle with a liquid conduit provided from the base of the bottle to its neck, where said conduit features a compressible pressure bulb for pressing to dispense the contents; US 5,601,212 describes a similar bottle with a trigger-operated pressure bulb pump; and WO 02/16047 A1 describes a fluid dispenser with an actuator located directly beneath an actuating wall which is pressed upon to expel the contents of the pumping chamber. While these prior art devices disclose the use of a section of the container as a pumping button for an integral pump, they all share the disadvantage that they constitute dedicated forms of packaging that are not adapted for ready fabrication on existing production lines. Furthermore, none of these prior art devices is designed for fabrication on a tube production line.

Further prior art devices include a number of less relevant dispenser designs: US 2,715,236 describes a rigid liquid applicator in which a flexible button component serves to complete a pumping chamber when depressed; UK application GB 2083142A describes a rigid container with a flexible curved wall in the nozzle part leading to a lip valve at the outlet; US 4,330,071 describes a dispenser in which a semi-spherical pressure bulb serves as a pumping button; US 4,651,904 describes a dispenser with a press-button on the side of the nozzle which presses an accordion or bellows; US 5,601,212 describes a squeezable long connecting nipple for attachment to a bottle thread; and commercial products in which a conventional dispensing pump is inserted into the end of a tube, such as the Precitube® (Cebal SAS, Gennevilliers, France). All these devices represent designs in which either the pumping button is not a section of the wall of the container, or the pumping mechanism is an external one as opposed to an integral one.

Further prior art includes a number of devices in which a separate, non-wall section of the container serves as a pumping button, as per US 3,361,305; application EP 0810160 A2; US 4,795,063 and US 5,871,126.

Thus there is no description in the prior art of a tube-like container having an inserted pumping mechanism, said mechanism then functioning as an integral pump wherein a section of the wall of the tube serves as a pumping button. The present invention refers to such a tube-like container in which this configuration is supported. Currently available tube-like containers appropriate to the current invention include both tubes and "tottles", where a tottle is a tube manufactured like a blow-molded bottle instead of extruded like a conventional tube. Accordingly, the term "tube" as used in this disclosure refers to both tubes and tottles, except where otherwise identified. As regards tubes, an additional cost factor in their production is the need, typically, to insert a tube head and provide a cap in order to complete the product. The design of the present invention can obviate this requirement as described below.

It is therefore the object of this invention to provide a dispensing tube containing an integral dispensing mechanism where a section of the tube wall serves as a button which actuates said dispensing mechanism; wherein said integral dispensing mechanism incorporates a pumping assembly which is fitted into an end of said tube.

It is also the object of the present invention to enable a method of fabricating a dispensing tube, said method consisting of inserting a pumping assembly into a tube such that the button section of the tube wall is aligned with the pumping chamber cavity of said assembly; thereby ensuring that depression of said button will serve to actuate the pumping mechanism so formed.

It is a further object of this invention to prevent any unintentional dispensing of the contents of the tube caused by squeezing of the tube as opposed to pressing the button.

It is furthermore the object of the present invention to enable simple and inexpensive fabrication of said tubes based around the use of an injected plastic part which is inserted into the tube on a relatively standard tube or bottle production line.

It is a still further object of this invention to obviate the need to insert the tube head and provide a cap as additional plastic parts in order to fabricate a complete working tube product; thereby achieving additional functionality without adding to the cost or complexity of the fabrication stages.

These and other objects of this invention will become more evident in the summary of the invention and in the description of the preferred embodiment.

SUMMARY OF THE INVENTION

According to the present invention there is now provided a dispensing tube comprising a tube sleeve into which a pumping assembly is inserted to form an integral dosing pump. At least one pumping button is provided in the wall of the tube where said button is aligned with the pumping chamber of said pumping assembly. The integral dosing pump so formed comprises an inlet valve leading into the tube, a non-return product dispensing valve and a pumping chamber which is internal to the tube; the arrangement being such that said dispensing tube is formed as a compact, self-contained unitary container and pump and depression of the pumping button to its displaced position causes the contents of said pumping chamber to be expelled via said product dispensing valve and return of said button to its first normal position causes the contents of the tube to enter said pumping chamber via said inlet valve.

In a preferred embodiment of the present invention said button comprises an embossed or thermoformed section of the wall of the tube.

In still further preferred embodiments of the present invention two such said buttons are provided, one along each along each side of the tube.

As will be realized, the present invention relates to a packaging system and method of assembly offering greater convenience than that provided by existing systems, while retaining the form factor of a standard tube. Unlike other systems which require the addition of an external pumping mechanism to a tube, the concept of inserting a pumping assembly so as to create an integral mechanism operated by a button section of the tube wall, enables a more natural integration of pump and tube, with a low parts count. Advantageously, the pumping assembly is inserted into the open end of a tube in a simple manner, thereby increasing the speed of assembly and ensuring that the tube of the present invention is simple to fabricate on existing or only slightly-modified production lines. The pumping assembly may be either partially or fully inserted into the open end of the tube. Appropriate insertion methods for accomplishing this include press-fit and snap-fit of a finished part; or head-injection whereby all or part of the pumping assembly is injected in situ within the tube ending. In the case where the assembly involves press-fit or snap-fit, a welding and/or adhesion step may additionally be used as required to improve the seal. Where a head-injection is performed, the seal to the tube wall is achieved by means of this injection, with the remainder of the pumping assembly (if any) being inserted through either end of the tube to connect to the head-injected part

The button(s) serves to pump out the liquid contents of the tube of the present invention in measured doses. The pressure resulting from the depression of the button causes the liquid in the pump chamber to be forced out of the outlet valve, where it exits via the nozzle connected to this valve. When the button is released, said button is arranged to regain its former position or shape, either due to a spring action or due to the button's internal structural stress. This causes low pressure within the tube, which in turn causes the liquid contents to fill up the pumping chamber via the inlet valve.

In the case that an air-compensation path into the tube via the pumping assembly is provided, the tube retains its shape as the contents are expelled over time; which is better from an ergonomic point of view as the tube remains easy to hold. However, in the case that air-compensation is not provided, the tube will gradually collapse as its contents are expelled. In this case, good ergonomics may be maintained by employing a tube-inside-tube construction, whereby the inner tube collapses while the outer one retains its constant shape.

In a preferred embodiment of the invention which relates to tubes (as opposed to bottles), the button is a thermoformed or embossed section of the side of the tube, where said thermoformed or embossed section can be pretreated to attain the desired mechanical properties by a number of methods, including but not limited to local coating, laminating and heat treatment. In the case that a bottle is used, the button can be formed as part of the blow-molding or injection molding of the bottle.

In a further preferred embodiment of the invention, the button is not deformed but is merely a marked area on the tube surface. In this case, the depression and return to first position of said button are a function of the inherent tendency of the material from which the tube is fabricated to bend and return to its initial shape. Advantageously, this design saves the manufacturing step of forming the button.

In a still further embodiment, the pumping assembly comprises a single injection-molded plastic component and one external elastomeric diaphragm.

In a still further preferred embodiment, the pumping assembly comprises a single injection-molded plastic component including all valves.

In a still further preferred embodiment, said plastic component further comprises the nozzle.

In a further preferred embodiment of the invention, dispensing of the liquid contents of the tube is only possible by depressing the button provided, whereas squeezing of the package as a whole serves to prevent any dispensing occurring. In this manner, an "anti-squeeze" functionality is enabled.

In a further preferred embodiment of the invention an extra member is provided to protect the pumping button while not in use. Said member can be a separate cap or flap or an integral extension of the plastic injection-molded component.

The invention will now be described in connection with certain preferred embodiments with reference to the following illustrative figures so that it may be more fully understood.

With specific reference now to the figures in detail, it is stressed that the particulars shown are by way of example and for purposes of illustrative discussion of the preferred embodiments of the present invention only and are presented in the cause of providing what is believed to be the most useful and readily understood description of the principles and conceptual aspects of the invention. In this regard, no attempt is made to show structural details of the invention in more detail than is necessary for a fundamental understanding of the invention, the description taken with the drawings making apparent to those skilled in the art how the several forms of the invention may be embodied in practice.

BRIEF DESCRIPTION OF THE DRAWINGS

The invention is herein described, by way of example only, with reference to the accompanying drawings, wherein:

Figure 1 illustrates the main components of a preferred dispensing tube according to the current invention in both exploded and assembled views;

Figure 2 shows a cut-away view showing the placement of the rigid plastic part inside the tube;

Figure 3 shows a cut-away view of the pumping chamber being activated by a thermoformed button, said button being shown in both its first normal and its second depressed positions;

Figure 4 illustrates the operation of the pumping assembly comprised of a plastic component with an external diaphragm;

Figure 5 illustrates the operation of the pumping assembly comprised of a plastic component which incorporates the valves; and

Figure 6 shows the post-injection and assembled views of the plastic component shown in Figure 5.

DETAILED DESCRIPTION OF THE DRAWINGS

The present invention will be described in detail according to the preferred embodiments illustrated in the accompanying drawings. Like reference numerals are used to identify identical components in the various views.

Referring to Figure 1, an overview of a preferred embodiment of the dispensing tube is shown. Figure 1a shows an exploded view of the tube 10 prior to assembly, showing the button 12 as a thermoformed or embossed section of the tube wall 14. Also shown is the pumping chamber 16 of said pumping assembly 17, which is aligned with said button section 12 on assembly. Two assembled configurations of this embodiment are shown in Figures 1b and 1c respectively, both as on-the-head type tubes. In Figure 1b, the pumping assembly 17 is entirely inserted into the end of the tube 10 such that the end of the assembly 17 is flush with the end of the tube 10. In this case, a hole 18 is shown cut into the tube wall so that the nozzle 19 may issue the contents through said hole 18. Alternately said hole can be replaced with a notch starting at the edge of the tube, and the nozzle in the injected plastic part will slot into said notch on assembly. The advantage of this latter configuration is that no extra manipulation is required at assembly in order to align the nozzle 19 with the hole 18. In Figure 1c, a slightly different

pumping assembly 17 is shown assembled into the tube 10 such that only part of the assembly 17 is inserted, and the nozzle 19 is implemented in the exposed part of the pumping assembly 17. This method of tube fabrication shown in Figure 1a through 1c may be readily implemented on a tube production line, and enables the inexpensive fabrication of a dosing tube with a sharply reduced parts count. Advantageously, whereas tubes typically terminate in either a dispensing cap or a formed nozzle with a screw thread and cap, this embodiment can also obviate the need to incorporate either of these traditional termination components, thereby further reducing complexity and cost. In this ergonomically advantageous configuration, the tube 10 may be easily grasped in the palm of the hand, while the thumb depresses the button 12. While the nozzle 19 may be located at any point in the side or base of the pumping assembly, in a further ergonomically preferred embodiment, the orientation of the nozzle 19 is approximately at right-angles to the pressure on the button, as shown. Advantageously, where the nozzle 19 is approximately flush with the tube wall (as per Figures 1a and 1b) or with the exposed part of the pumping assembly (as per Figure 1c), a shipping seal (not shown) may be easily added by merely applying tape across the nozzle. If required, a further button may be located on the opposite side of the tube (not shown), aligned with an extension of the pumping chamber located beneath that point. The nozzle 19 may be terminated by any form of cap, closure or shipping seal, as known in the art. Said caps, closures or seals may be further enhanced with a tamper-evident seal as is known in the art.

The sleeve of the dispensing tube of the present invention may be fabricated from any laminate or plastic tube materials, or from plastics appropriate to a bottle, as long as the mechanical properties of such materials, together with the geometry of the pump, provide the performance and tactile characteristics required and are chemically compatible with the contents. Appropriate tube laminate materials include but are not limited to the list including polyethylene, EVOH, maleic anhydride copolyethylene, in various multi-layer combinations with appropriate adhesives. Foil laminates may further incorporate aluminum or other metalized foil layers for high-barrier applications. Plastic tube materials include but are not limited to mono-layer polyethylene in various

densities; co-extruded plastic combining polyethylene, EVOH, and adhesive; and an aluminum layer for high-barrier applications. Plastics suitable for bottle fabrication include but are not limited to extruded or blow-molded high density polyethylene (HDPE), LDPE, MDPE, PETG, EVOH and PVC.

Referring now to Figure 2, a preferred embodiment showing the role of the pumping assembly 17 within the tube 10 is shown in a cut-away diagram. The contents 20 of the tube 10 enter the pumping assembly 17 via the inlet channel 22 of the pumping assembly and non-return inlet valve 24, in order to reach the pumping chamber 16. On depression of the button 12 to its second or depressed position, the contents of the pumping chamber 16 are dispensed via non-return outlet valve 28 to the nozzle 19. The button 12 then returns to its first normal or initial position due to its internal stress. As it does so, low pressure in the pumping chamber 16 causes further contents 10 of the tube to enter said chamber 16 as stated above. If no air-compensation is provided, the dispensing of the contents 10 in this manner will cause the gradual collapse of the tube 10; albeit the tube 10 can then be used in any orientation. On the other hand, where an air-compensation route (not shown) is provided, the tube will maintain its shape due to the fact that air takes the place of the ejected contents. In this latter case, in order to maintain fluid contact between the contents 20 and the inlet channel 22, the tube of the present invention must be used in an on-the-head configuration (or provide an uptake tube to the location of the contents). Note that in some cases, it is advantageous to keep the contents 20 air-free while also maintaining the external form of the tube (for ergonomic reasons). In this case, a double sleeve arrangement (not shown) may be used in which the inner sleeve is a collapsible tube wall while the more rigid outer sleeve maintains its shape, with venting being provided between the two sleeves. Another means of maintaining the tube's shape without the need for air-compensation is the use of a piston located at the far end of the tube, said piston gradually advancing as the content is dispensed. Said piston may be supported with a spring in order to overcome friction and to assist the return of the pumping button to its initial position.

Referring now to Figure 3, a cut-away view of the pumping chamber 16 being activated by a preferred embodiment of a formed toggle button 12 is shown. For a regular tube, such a button 12 may be formed by thermoforming or embossing the tube wall 14. However, advantageously, when using a tottle, such a button 12 may be formed as part of the blow-molding (or injection molding) of the tottle itself. Said button 12 may be toggled between a first normal position as per Figure 3a, and a second depressed position as shown in Figure 3b. The button 12 is typically depressed by the consumer pressing it with a thumb. When the consumer then removes his/her finger or thumb, the button is automatically restored to its initial position due to the internal stress within the plastic. Also shown in this view are: the channel leading into the pumping chamber 16 through the non-return inlet valve 24; and the channel leading from the pumping chamber 16 to the non-return outlet valve 28. Depression of the button 12 causes the contents of the pumping chamber 16 to be expelled along the channel to the outlet valve 28; while the return of the button 12 to its first position causes low pressure within the chamber 16, which in turn causes additional uptake of the tube contents 10 via the channel from the inlet valve 24. The functioning of the button 12 is dependent not only on its shape but also on its thickness and mechanical properties such as its elasticity. For example, a thicker button will tend to have a pure toggle action in that, when pressed, it will rapidly jump ahead to its fully-depressed position. However, a thinner or otherwise less stiff button will need the consumer's depression action to continue further towards the fully depressed position. In terms of the volumes dispensed in each case, the former case will always produce a fixed dose, whereas the latter will dispense a volume which is a function of how deeply the button was pressed. Also falling into the latter category is the case mentioned above where the button 12 is merely a marked section of an otherwise un-contoured tube wall. In this case, the depression of the button is merely the deformation of a cylindrical section of the tube wall into the cavity of the pumping chamber. In this way, a well-performing pump can be achieved even without making the deformation in the wall described above; but rather simply exploiting the fact that the tube wall is curved. However, the thermoformed button design is more flexible in both design and performance.

The above description of the dispensing tube of the current invention is generic in the sense that it does not describe the details of the valves used and the engineering approach used in fabricating said valves within the pumping assembly. Figures 4 and 5 below illustrate two distinct engineering approaches to this question of valve implementation, but the generality of this patent is not limited to a specific valve type, and thus the invention claimed can use either of these valve types, any combination of the two, or any other valve design approach.

Referring now to Figure 4, a preferred embodiment of the pumping assembly 17 is shown, in which an external diaphragm 40 serves to complete the valves. Figure 4a shows an isometric view of the plastic component 42 of the pumping assembly showing the channels and chambers it defines, while Figure 4b shows the same view but with the diaphragm 40 in place around it or surrounding it. Referring now to Figure 4c, the view from above (i.e. from the tube interior) shows the inlet channel 22 leading down into the plastic component 42 and then along into the pumping chamber 16. The entry of said inlet channel 22 into said pumping chamber 16 is barred by the diaphragm 40, such that, when there is low pressure in the pumping chamber 16, the diaphragm section marked 44 is pulled away from the inlet channel 22 (where it enters the pumping chamber 16), enabling the tube contents to enter said pumping chamber. In this manner, the diaphragm at the point where the inlet channel 22 enters the pumping chamber 16 functions as a non-return inlet valve. Similarly, the outlet channel 45 leads from the pumping chamber 16 to the nozzle 19, and the diaphragm section 46 at said channel's exit from the pumping chamber 16 serves as an outlet valve 28 which only opens when the button 12 is pressed, causing high pressure in the pumping chamber 16. Note also that this high pressure in the pumping chamber 16 causes the inlet valve 24 to seal at this time.

Referring now to Figure 4d, a further preferred embodiment of this implementation of the pumping assembly is shown. In this embodiment, the outlet channel 45 does not lead directly to the nozzle 19 but instead the outlet

valve 28 is a pressure valve (as opposed to a check valve) and is located in an outlet chamber 46 which is physically removed from the nozzle 19. Said outlet chamber 46 is separated by the diaphragm 40 into a pressure cell 41 on one side and the fluid path from the pumping chamber 16 to the nozzle 19, on the other side 43. The fluid in the pressure cell 41 does not participate in the flow path. The path in the outlet chamber 46 is arranged such that an increase in pressure in the pressure cell 41 will choke the flow path 43 by pressing the diaphragm 40 toward it. This outlet valve 28 will open whenever the pressure in the pumping chamber 16 rises, i.e. on a pumping action. The pressure cell 41 is in fluid contact with the body of the tube and thus, when the pressure in the interior of tube rises, the outlet valve 28 will shut-off. This functionality prevents the dispensing of the tube's contents that would otherwise occur on simply squeezing the tube (as opposed to pressing the button 12). In this way, an anti-squeeze functionality can be implemented. As shown, a pressure channel 47 leads from the interior of the tube to said outlet chamber 46, serving to close the outlet valve 28. Only when the pressure from the outlet channel 45 is greater than that conveyed from the interior of the tube will the outlet valve 28 open and enable the content of the pumping chamber to flow to the nozzle 19. If required, a spring may be implemented in the above described pressure valve to support either its opening or closing, in accordance with the content and the valve design.

Suitable materials for the diaphragm shown in Figure 4 may be any elastomeric material with appropriate elastic performance, providing that it meets the minimum requirements in terms of shelf-life, fatigue resistance over the planned use period, compatibility with the chemical and mechanical properties of the contents, and suitable mechanical properties in terms of the valve design. Suitable elastomeric materials include silicone rubber, Santoprene® from Advanced Elastomer Systems, L.P. (Akron, OH, USA), and NBR (nitrile butille rubber).

As will be obvious to one skilled in the art, a pressure compensation valve can be implemented in the pump assembly shown. A pressure compensation valve is a check valve or a pressure valve which opens toward the direction of

the interior of the tube when the pressure outside the tube is greater than the pressure in the tube. Such a compensation valve can either be a stand-alone feature or combined within the dispensing flow path. As shown in Figure 4, in this preferred embodiment, said air-compensation mechanism is combined within the dispensing flow path. To accomplish this, a bypass groove (not shown) is implemented at the fluid exit point 48 of the pump assembly 17, ensuring that the diaphragm does not block "opposite flow" (i.e. the flow of air into the mechanism). Thus, the moment the pressure drops inside the tube the diaphragm section 46 in the outlet chamber 41 will be forced to separate from the flow path 43 enabling air to flow into the pressure cell and from there into the tube interior.

Referring now to Figure 5, a further preferred embodiment of the pumping assembly is shown. In this embodiment the valves are implemented in plastic as described below. The inlet channel 22 conveys the material to be dispensed from the interior of the tube as per Figure 4 above. At the entry point of said channel to the pumping chamber 16 an inlet valve 50 formed using a dome and sealing lips is implemented in plastic such that said valve will only open when there is low pressure in the pumping chamber 16. Similarly, the outlet valve 52 leading from the pumping chamber 16 to the nozzle 19 is a similarly constructed non-return valve, oriented such that high pressure within the pumping chamber 16 (as a result of the consumer pressing the button 12) causes this valve to open and the contents to be expelled via the outlet channel 45 to the nozzle 19. Said high pressure will also ensure that the inlet valve 50 remains closed during this button depression operation. If required, a spring may be implemented in one or more of the above described valves to support either their opening or closing, according to the content type and the valve design.

Referring now to Figure 6, post-injection and assembled views of the plastic component shown in Figure 5 are provided respectively. As a completed valve cannot be injection molded directly (as the dome would attach to the sealing lips), this preferred embodiment shows the pumping assembly as it emerges from the injection-molding machine, showing the plastic inlet valve

50 and outlet valve 52; each with the dome separated from the sealing lips. The hinge 60 enables the two sides of this plastic component to be mutually engaged, such that the valves sections are assembled into complete working valves, as shown in Figure 5. The use of this type of valve enables this component to be produced as one part. In a further preferred embodiment, said plastic component can be produced in two halves and then assembled.

The plastic component(s) of the pumping assembly can be produced from any injectable plastic, as long as it satisfies the mechanical requirements for the specific design and tube content, including but not limited to PP, PE, and PVC. The valve mechanisms used for the inlet and outlet valves may be any type of pressure valve or check-valve as known in the art. In addition to the membrane valves shown above, any other type of spring or leaf valve may be used, and their orientations may be either parallel (in-line) to or perpendicular (deviated) to the liquid flow.

Advantageously, by having a delay in the return of the outlet valve to its closed position, a small suck-back from the nozzle will be gained, and this is useful in keeping the end of the nozzle 19 clean after use. Such a delay can be achieved by several methods, including having a long travel of the sealing element between its open and closed positions, by a viscous interaction between the sealing element and the fluid as it moves, or by making the sealing element out of elastic materials with large tensile hysteresis.

As will be obvious to those skilled in the art, a number of alternative embodiments exist for the nozzle part of the dispensing tube of the present invention, including but not limited to such structures as needle and catheter-type nozzles. For example the nozzle may terminate in a cap or other closure; the nozzle may be a rotating one, either with or without a shut-off valve; the nozzle may incorporate a special applicator such as a brush for paints, a dropper for eye drops or nasal drops, a foam pad for polish application or a shaping nozzle for food decorations. A notch feature on the nozzle may serve to snap off a tamper-proof portion at the end of the nozzle. Alternative or additional seal and tamper proof indication may be provided by

a foil layer covering said nozzle. The nozzles employed may be either rigid or flexible. Additionally, either the nozzle or the pumping assembly can include an additional cut-off valve. Such a manually-actuated safety valve, preferably one which cannot be operated by a young child, provides an important safety feature.

As will be obvious to one skilled in the art, it is possible to provide a duplication of the pumping mechanism within a single tube such that it could contain a plurality of parallel pumping mechanisms. Example applications for such an embodiment include: one mechanism for oil and one for vinegar for making a salad dressing; one for mustard and one for ketchup for providing a combination of condiments; one for shaving gel and one for aftershave to provide a complete shaving application kit; and two separate chemicals for a medical diagnostic, etc. In such an embodiment, a plurality of inner chambers or sleeves can be used within the tube, one connecting to each pumping mechanism in order to dispense each substance separately. Alternatively, just a single pumping mechanism could be provided, where a plurality of substances is mixed either (a) at the time of dispensing, or (b) prior to dispensing by means of an appropriate manually-operated valve. Additionally, one or more of said chambers can be integrated into the pumping assembly, and introduced into the dispensed stream by activating a further button in said assembly. An additional means of introducing a further liquid into the tube of the present invention is to provide a septum in either the plastic wall of the tube or the pumping assembly, whereby an external liquid can be injected into the tube via said septum. This feature is important in medical applications. Within the context of dividing the tube into sections, it is also possible to have part of the tube implement the dispensing mechanism as described above, while having a further section of the tube constitute an isolated compartment. Said isolated compartment may serve to hold additional products that are in some way related to, or used in conjunction with, the contents of the container. For example, said compartment may hold (a) a razor and shaving blade, thereby comprising a complete shaving travel kit in conjunction with the gel and aftershave contents of the tube as described above; all within a single tube product; (b) a paintbrush if the liquid

contents are paint, (c) an applicator if the contents are a face crème, (d) a sponge or brush if the contents are a shoe polish; and (e) a toothbrush if the contents are toothpaste, etc. In this manner, advantageously, the utility of the container is increased while almost no cost is added. Said compartment may open out according to a number of means, including but not limited to having an opening flap utilizing the container wall as a live hinge, a zip, or a pull-out drawer. Furthermore, said compartment can be formed either as part of the tube body 10 or within the pumping assembly 17.

The tube of the present invention can be used to dispense small quantities of liquids such as, for example, a sauce, a crème, a shampoo, a liquid soap, a shaving gel, a hair conditioner, either oil-based or water-based paints, shoe polish, toothpaste, or any liquid comestible substance, etc.

A further enhancement of the package of the present invention involves the inclusion of an electronic module which may or not be interfaced with any of the valves described above. Said electronic module can serve as a timer, dosage counter, freshness indicator, or cold-chain monitor; or may implement any combination of these functions. In the case that the liquid in the tube is a medication, a timer can serve the important function of alerting the patient to the need to take the next dose.

It should be apparent to one versed in the art that the tube of the present invention can be a part of another product such as a cartridge for a dispensing machine or a complex machine that requires the dispensing of doses of liquid.




While the invention has been shown herein in what is presently conceived to be the most practical and preferred embodiment thereof, it will be apparent to those of ordinary skill in the art that many modifications may be made thereof within the scope of the invention, which scope is to be accorded the broadest interpretation of the appended claims so as to encompass all equivalent structures and devices.

WHAT IS CLAIMED IS:

1. A dispensing tube comprising a tube-like container, a pumping assembly inserted into an open end of said container at time of fabrication, and a pumping button; wherein said button is a section of the tube wall and depression of said button actuates said pumping assembly.
2. A dispensing tube according to claim 1 where said pumping assembly comprises a pumping chamber, a non-return inlet valve leading into the interior of the tube and a non-return outlet valve leading to a nozzle.
3. A dispensing tube according to claim 2 where said button is aligned with said pumping chamber such that depression of said button serves to actuate the pumping mechanism formed therebetween.
4. A dispensing tube according to claim 3 where said pumping assembly further comprises an air compensation path such that air replaces the contents of the tube as said contents are dispensed.
5. A dispensing tube according to claim 1 where said button is a formed section of said tube wall where said forming is accomplished using means including but not limited to thermoforming, embossing and blow-molding.
6. A dispensing tube according to claim 1 where said button is a marked, non-formed section of said tube wall.
7. A dispensing tube according to claim 1 where said pumping assembly comprises a single plastic component surrounded by an elastomeric diaphragm; wherein said diaphragm serves to complete at least one valve.
8. A dispensing tube according to claim 1 where said pumping assembly comprises a single, hinged plastic component with integral valve sections, said valves being assembled by closing said hinge.
9. A dispensing tube according to claim 1 where said pumping assembly comprises two plastic components with integral valve sections, said valves being fabricated by assembling said components.
10. A dispensing tube according to claim 1 where said pumping assembly comprises a component which is head-injected into said tube, optionally further comprising additional parts subsequently attached to said head-injected component.

11. A dispensing tube according to claim 1 where said nozzle operates through a notch in said tube wall.
12. A dispensing tube according to claim 1. where said nozzle further comprises a tamper-evident seal.
13. A dispensing tube according to claim 2 where said outlet valve comprises a pressure valve wherein pressure from the interior of the tube serves to close said valve, thereby preventing unintended dispensing of the contents.
14. A dispensing tube according to claim 1 further comprising an additional button, said button also actuating said pumping assembly; such that depressing both buttons increases the amount of content dispensed.
15. A dispensing tube according to claim 1 further comprising a plurality of additional pumping assemblies and buttons, such that a plurality of substances can be dispensed separately.
16. A dispensing tube according to claim 1 further comprising a plurality of inner tube sleeves, such that at a plurality of different substances may be dispensed together.
17. A dispensing tube according to claim 1 further comprising a plurality of inner tube sleeves, such that a plurality of different substances may be mixed prior to application and dispensed together.
18. A dispensing tube according to claim 2 further comprising an inner tube sleeve where said inner tube sleeve collapses as the contents of said inner tube sleeve are dispensed while the external tube wall maintains its shape.
19. A dispensing tube according to claim 2 further comprising a piston as the far end of the tube, where said piston advances as the contents of said tube are dispensed, such that the tube maintains its shape.
20. A dispensing tube according to claim 2 wherein depression of the button to its depressed position causes the contents of said pumping chamber to be expelled via said non-return outlet valve and return of said button to its initial position causes the contents of said tube to enter said pumping chamber via said inlet valve.
21. A dispensing tube according to claim 1 where said dispensing tube is fabricated by the insertion of a pumping assembly into a tube.

22. A dispensing tube according to claim 1, wherein said liquid is one of the group comprising a perfume, an eau de toilet, a breath freshener, a shampoo, a liquid soap, a shaving gel, a hair conditioner, a comestible substance, snuff, an inhalable medicine, an oil, water-based paint, oil-based paint or shoe polish.
23. A dispensing tube according to claim 1, further provided with a manually-actuated safety valve which cannot be operated by a young child.
24. A dispensing tube according to claim 1 where the tube-like container may be any of the group consisting of plastic tubes, laminate tubes and bottles.
25. A dispensing tube according to claim 1, further comprising an isolated compartment within the body of the tube; said compartment containing an item to be used in conjunction with the contents of said tube.
26. A dispensing tube according to claim 2, further comprising a shipping seal in the form of a tape; said tape being adhered to a section of said tube such that said tape covers said nozzle.

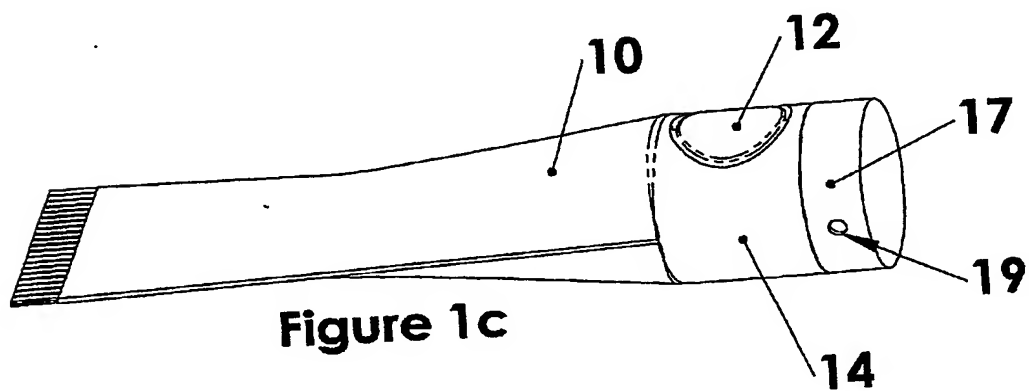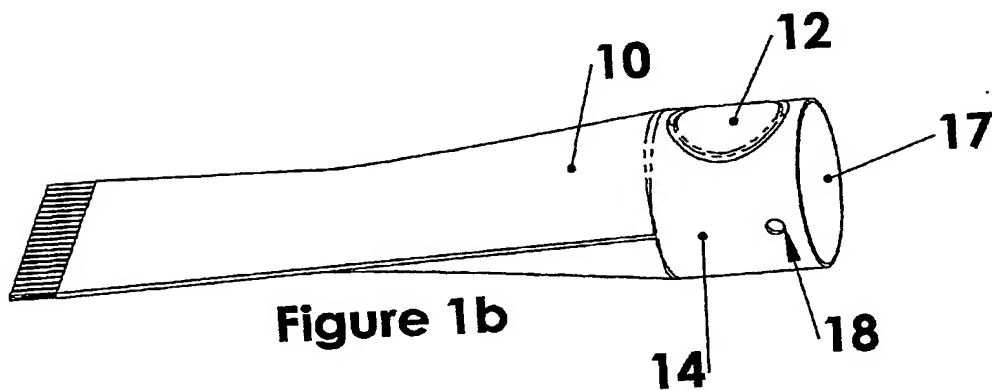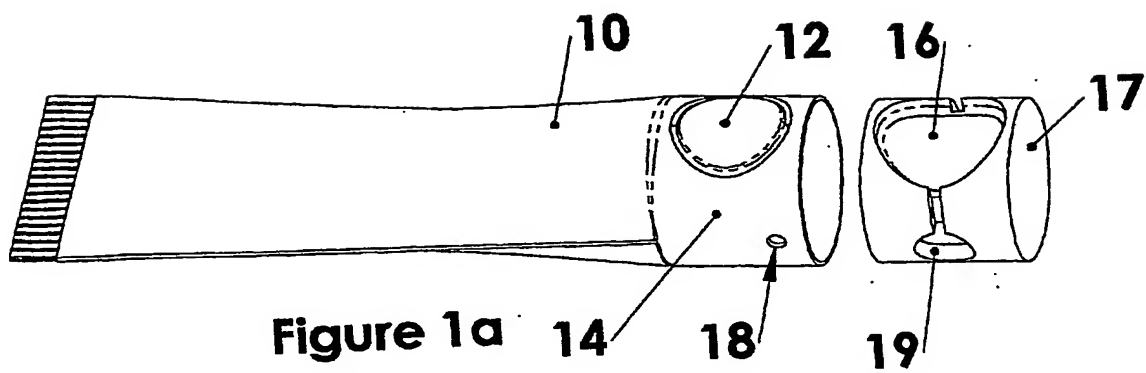

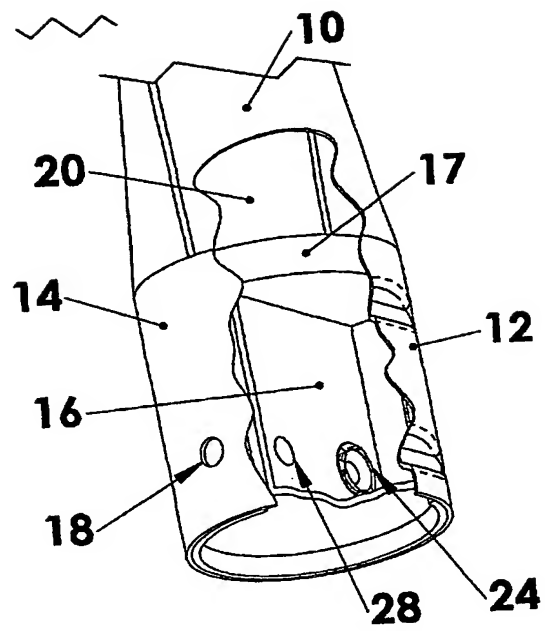


Figure 2

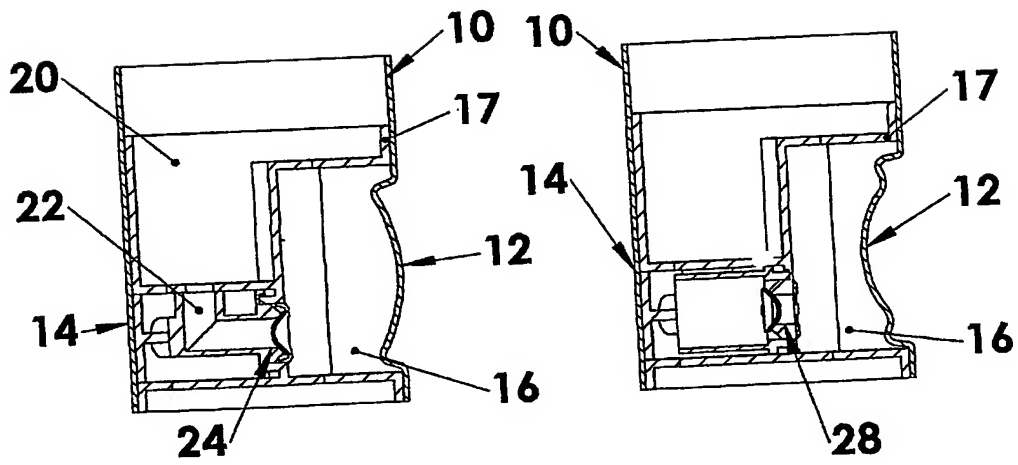


Figure 3a

Figure 3b

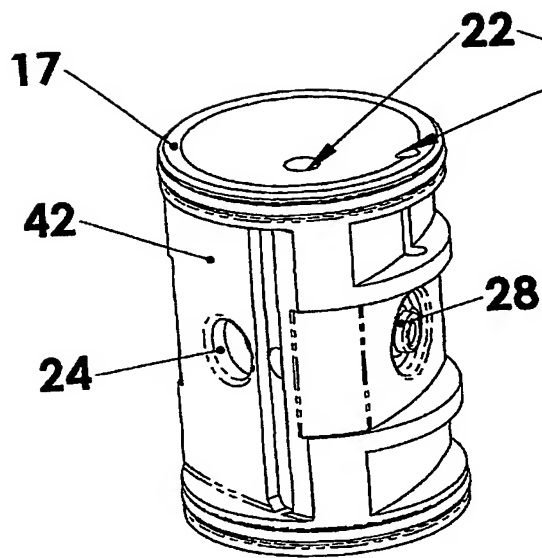


Figure 4a

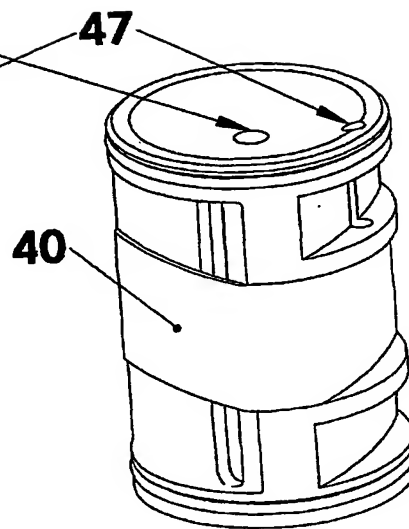


Figure 4b

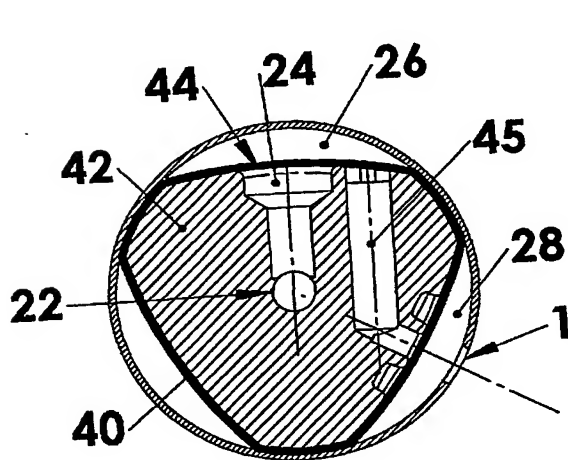


Figure 4c

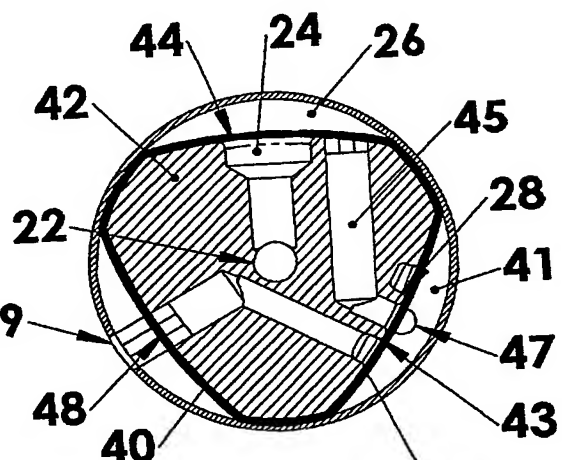


Figure 4d

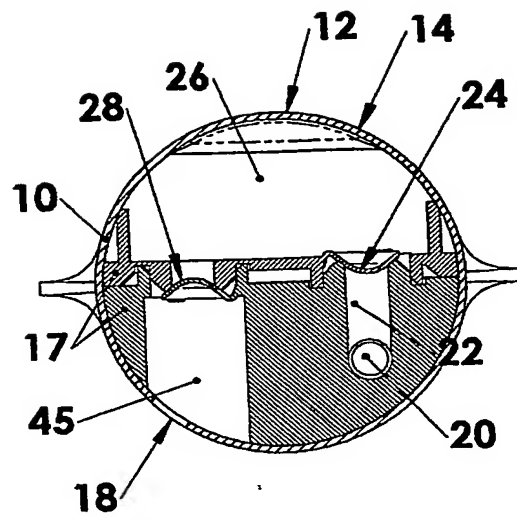


Figure 5

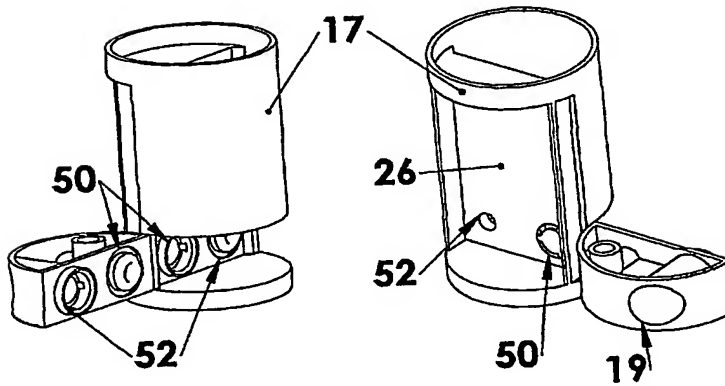


Figure 6a

Figure 6b




Figure 6c

Document made available under the Patent Cooperation Treaty (PCT)

International application number: PCT/IL04/001024

International filing date: 09 November 2004 (09.11.2004)

Document type: Certified copy of priority document

Document details: Country/Office: IL
Number: 158,887
Filing date: 16 November 2003 (16.11.2003)

Date of receipt at the International Bureau: 24 January 2005 (24.01.2005)

Remark: Priority document submitted or transmitted to the International Bureau in compliance with Rule 17.1(a) or (b)



World Intellectual Property Organization (WIPO) - Geneva, Switzerland
Organisation Mondiale de la Propriété Intellectuelle (OMPI) - Genève, Suisse

**This Page is Inserted by IFW Indexing and Scanning
Operations and is not part of the Official Record.**

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ **BLACK BORDERS**
- ☐ **IMAGE CUT OFF AT TOP, BOTTOM OR SIDES**
- ☐ **FADED TEXT OR DRAWING**
- ☐ **BLURRED OR ILLEGIBLE TEXT OR DRAWING**
- ☐ **SKEWED/SLANTED IMAGES**
- ☐ **COLOR OR BLACK AND WHITE PHOTOGRAPHS**
- ☐ **GRAY SCALE DOCUMENTS**
- ☐ **LINES OR MARKS ON ORIGINAL DOCUMENT**
- ☐ **REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY**
- ☐ **OTHER: _____**

IMAGES ARE BEST AVAILABLE COPY.

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.